


Factsheet

ILA site

PoP - Middenmeer (Agriport)

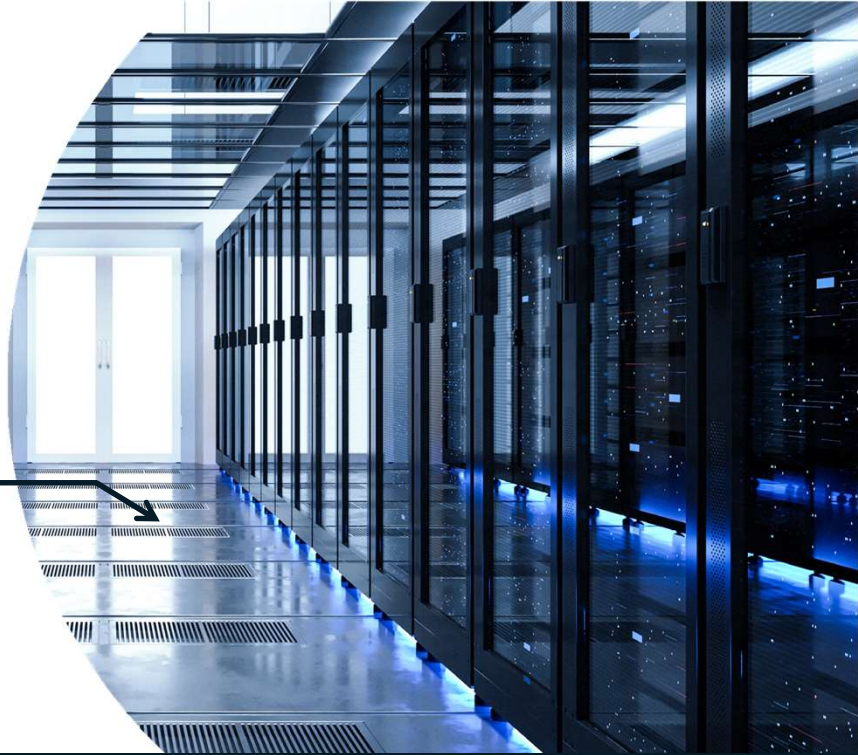

Location

Leeuwentand near no. 9
1775 BS Middenmeer

X-129116.163

Y-535345.591

Rack

PDU with A- and B-feed
48 VDC / 25A breaker

Rack with lock or key
combination

PDU with WCD 230 VAC

Doors perforated

Entire Rack 800x800 total 47 U(HE),
available 44 U(HE)

Half Rack 800x800 total 23 U(HE),
available 20 U(HE)

Potential elevation through internal earthing-
and equipotential bonding installation in
accordance with NEN-EN-IEC 62305

Hybride UPS systeem

48
VDC / 12 kW

230
VAC / 6 kVA

28x
Wing ESL180-12FTHT

500 Minutes
of autonomy at 6 kw

NSA
connection

3x 50A
Commercial supply

Actief monitoringssysteem Apollo / Iprotect

- Temperature
- Control commercial supply
- Access system

- Humidity
- Smoke detection
- Leak detection

- Camera surveillance
- **Note:** only real time
- Motion detector

Layout

- Air conditioning 3.5 kW, dual
- Foam extinguisher, 6 liters

- Cable tray system fiberglass,
100mm

- Wire mesh tray system, 100mm
- First aid kit



Relined.BV.
+31 (0)347 358 010
sales@relined.eu

RelinedGmbH
+49 (0)32 22 999 0075
sales@relined.eu